



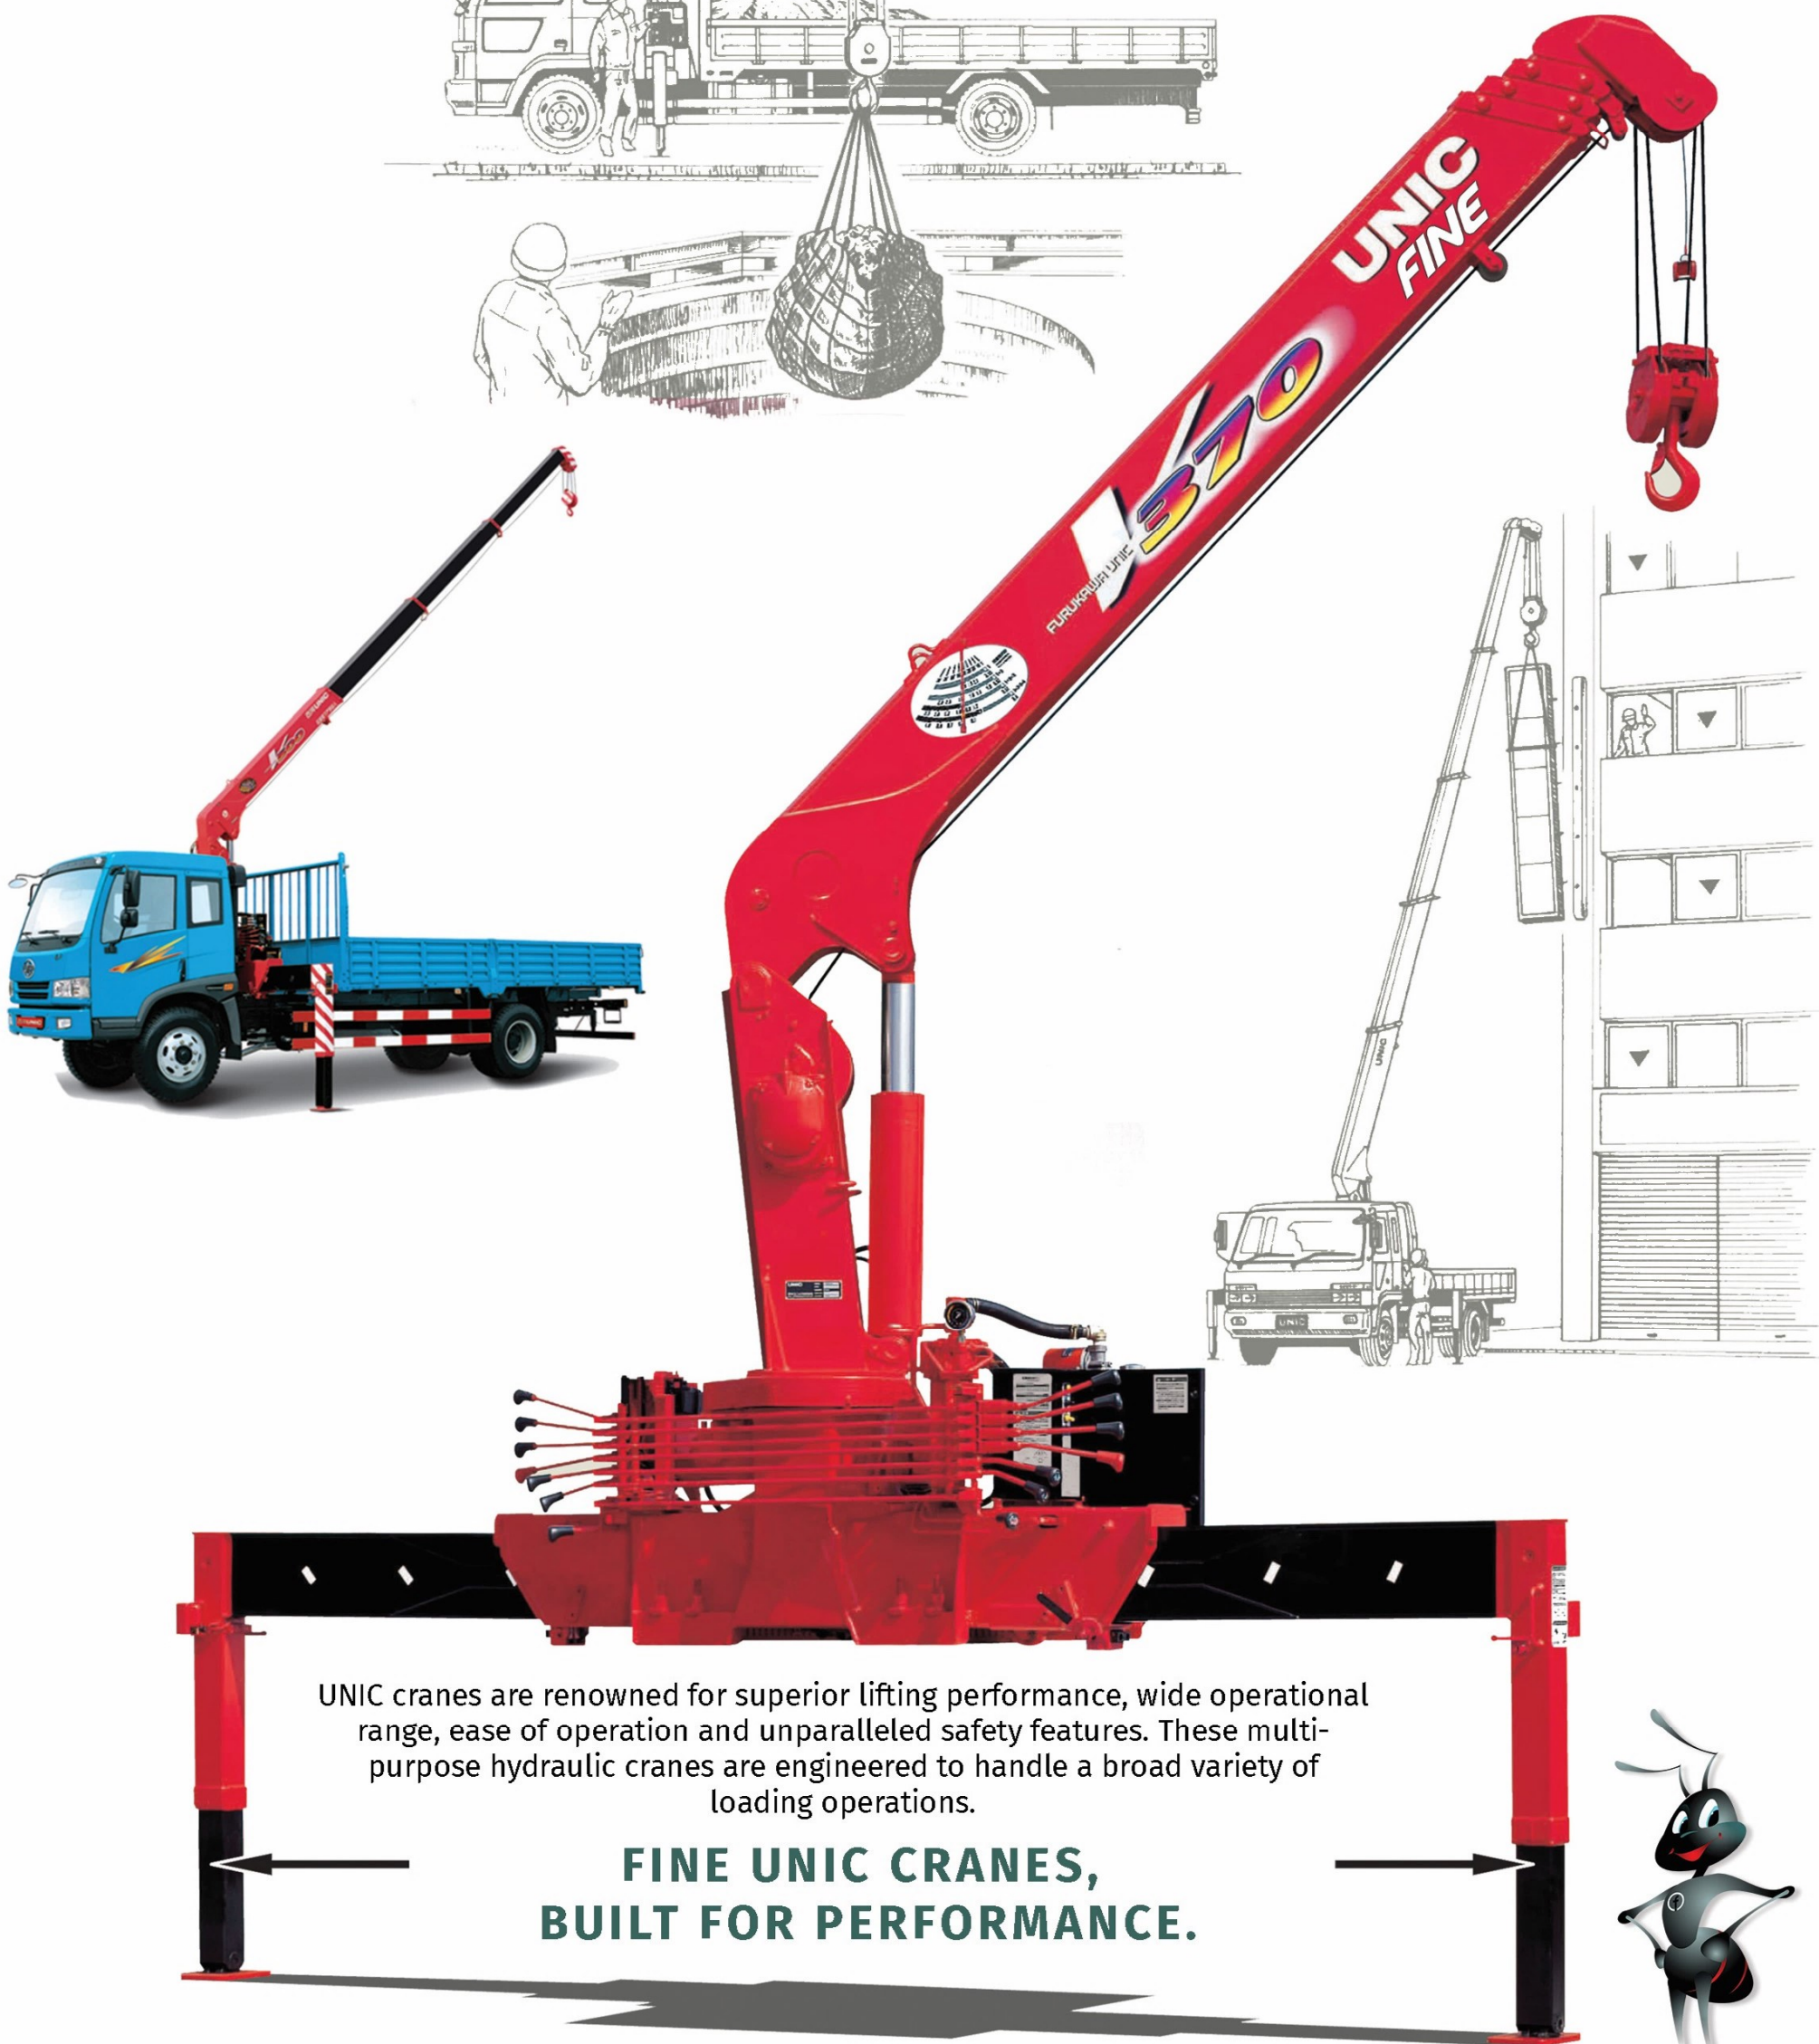


UNIC cranes are renowned for superior lifting performance, wide operational range, ease of operation and unparalleled safety features. These multi-purpose hydraulic cranes are engineered to handle a broad variety of loading operations.

**FINE UNIC CRANES,
BUILT FOR PERFORMANCE.**

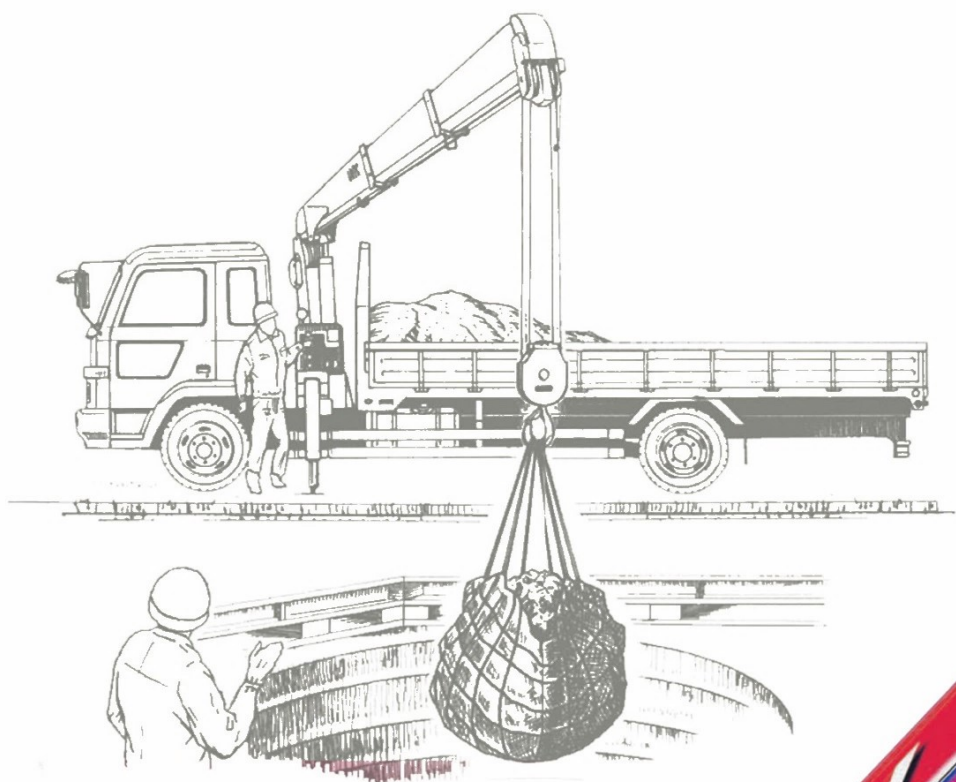

**HIGH
LIFTING
PERFORMANCE**

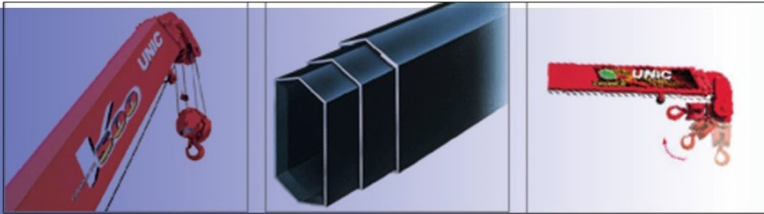

**EASY
OPERATION**

**SAFE
AND
DURABLE**



**WIDE
WORKING
RANGE**

MODEL WISE SPECIFICATIONS

Crane Model	Max Lifting Capacity (t @ m)	Boom Sections (#)	Min - Max Outreach (m)	Max Hook Height	Max Hook Depth	Max Boom Angle	Outrigger Span	Hydraulic Tank Capacity	Sleeving Speed
UR-V293	3.03 @ 1.6	3	0.66 - 6.43	7.60 m	- 7.40 m	76°	3400 mm	22 liters	2.5 rpm
UR-V294		4	0.75 - 8.73	9.80 m	- 10.10 m				
UR-V373	3.03 @ 2.7	3	0.65 - 7.51	9.20 m	- 8.70 m	78°	4200 mm	32 liters	2.5 rpm
UR-V374		4	0.67 - 9.81	11.40 m	- 11.50 m				
UR-V503	5.05 @ 2.5	3	0.69 - 8.13	10.10 m	- 9.40 m	78°	4800 mm	60 liters	2.5 rpm
UR-V504		4	0.70 - 10.63	12.50 m	- 12.50 m				
UR-V803	8.07 @ 2.5	3	1.21 - 9.20	10.80 m	- 10.00 m	72°	5100 mm	90 liters	1.5 rpm
UR-V804		4	1.24 - 12.5	14.00 m	- 13.70 m				
URG - 1204	12.00 @ 2.5	4	1.23 - 16.0	17.70 m	-	76°	6000 mm	150 liters	2.0 rpm
URV - 1505	15.00 @ 2.3	5	1.05 - 18.11	20.00 m	-	76°	7200 mm	200 liters	2.0 rpm

Crane Model	Boom Extension Speed (m / sec)	Hoisting Speed	Boom raising Speed (1°-max°)	Wire Rope	Line Pull	Hook Block	Hydraulic Pump	Hydraulic Pressure
UR-V293	3.81 / 10	17.0 m/min @ 4th layer 4PL	5 seconds	IWRC6 x WS(26) (8mm x 44 m)	750 Kg	3000 kg	53 L / min @ 1700 rpm	20.6 Mpa
UR-V294	5.73 / 11			IWRC6 x WS(26) (8mm x 54 m)				
UR-V373	4.39 / 11	19.0 m/min @ 4th layer, 4PL	7 seconds	IWRC6 x WS(26) (8mm x 51 m)	750 Kg	3000 kg	60 L / min @ 1700 rpm	20.6 Mpa
UR-V374	6.59 / 14			IWRC6 x WS(26) (8mm x 62.5 m)				
UR-V503	4.83 / 17.5	17.0 m/min @ 4th layer 4PL	12 seconds	IWRC6 x WS(26) (10mm x 56m)	1250 kg	5000 kg	60 L / min @ 1400 rpm	20.6 Mpa
UR-V504	7.27 / 21.5			IWRC6 x WS(26) (10mm x 69 m)				
UR-V803	5.30 / 22.5	9.80 m / min @ 4th layer 6PL	22.5 seconds	IWRC6 x WS(29) (10mm x 86 m)	1345 kg	8000 kg	60 L / min @ 1400 rpm	20.6 Mpa
UR-V804	8.50 / 29			IWRC6 x WS(29) (10mm x 108 m)				
URG - 1204	10.71 / 26.5	15m/mn @ 4L 6PL	12.5 seconds	IWRC6 x WS(26) (12mm x 135 m)	2000 kg	12000 kg	100LPM/1250	28.0 Mpa
URV - 1505	12.80 / 45	10m/mn @ 4L 6PL	20.0 seconds	IWRC6 x WS(29) (14mm x 150 m)	2700 kg	15000 kg	110LPM/1020	28.0 Mpa


Truck Crane Mounting detail (*)						Suitable Truck	
Crane Model	Height mm	Length mm	Width at Outrigger in Retracted position	Min Mounting space occupied between Cabin and Cargo Body	Weight of Crane	Wheel base min	GVW min
UR-V293	1851	2979	1710 mm	575 mm	955 kg	3200 mm	4.5 t
UR-V294	1859	3359			1135 kg		
UR-V373	2092	3494	2150 mm	650 mm	1045 kg	3800 mm	10t
UR-V374	2095	3594			1135 kg		
UR-V503	2312	3720	2370 mm	750 mm	1450 kg	4200 mm	16t
UR-V504	2312	3779			1575 kg		
UR-V803	2345	4325	2460 mm	1100 mm	2850 kg	Multi axle Truck	25t
UR-V804	2373	4425			3100 kg		
URG - 1204	2615	6322	2300 mm	1150 mm	4700kg	Multi axle Truck	25t
URV - 1505	2623	7750	2270 mm	1350 mm	7070 kg		

GREATER OUTREACH

MORE ACCURATE LOAD PLACEMENT

SUPERIOR DURABILITY


UNLIMITED RANGE OF ROTATION

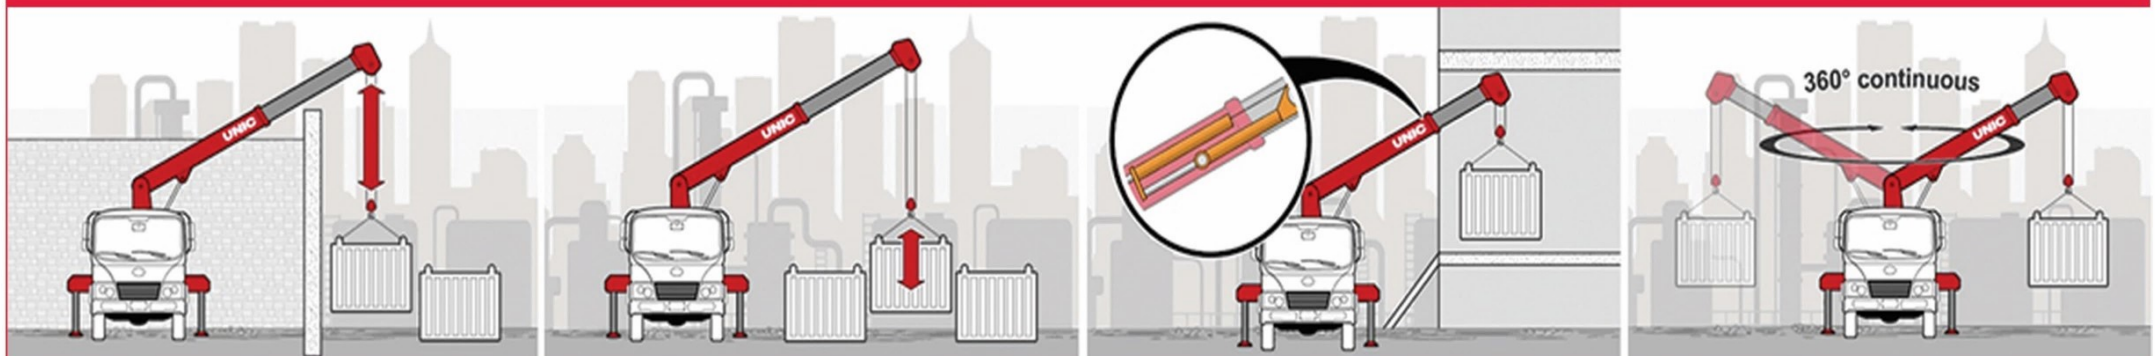

STRENGTH YOU CAN TRUST

FINE UNIC CRANES, BUILT FOR PERFORMANCE

Crane Model UR-V 293	Working Radius	1.70	1.80	2.00	2.50	3.00	3.50	4.00	5.00	6.00	6.43
	Rated Load Boom 1	3.03	2.55	2.28	1.83	1.73 @ 2.62 m					
	Hook Height B1	3.25	3.25	3.00	2.50	2.50					
	Rated Load Boom 1+2	3.03	2.55	2.28	1.83	1.48	1.25	1.08	0.98 @ 4.55 m		
	Hook Height B2	5.25	5.25	5.00	5.00	4.75	4.25	3.50	1.50		
	Rated Load Boom 1+2+3	1.28 @ 2.2 M			1.63	1.33	1.13	0.98	0.78	0.63	0.58
	Hook Height B3	7.60			7.25	7.00	6.75	6.25	5.25	3.50	1.50

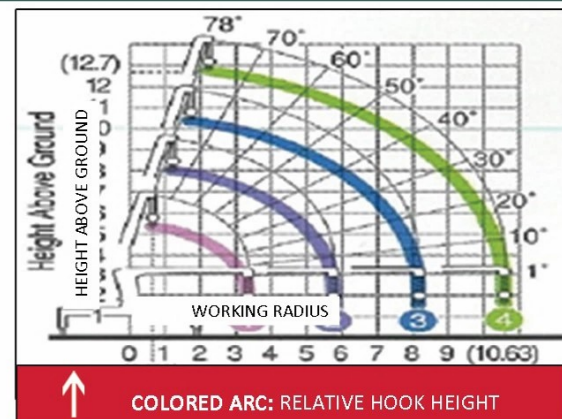

Crane Model UR-V 373	Working Radius	2.00	2.50	2.70	3.00	3.20	3.50	4.00	4.50	5.00	5.50	6.00	6.50	7.00	7.51
	Rated Load Boom 1	3.03	3.03	3.03	2.48	2.30									
	Hook Height B1	4.00	3.50	3.00	1.50	1.50									
	Rated Load Boom 1+2	3.03	3.03	3.03	2.48	2.28	2.03	1.73	1.53	1.33	1.25				
	Hook Height B2	6.75	6.50	6.25	6.00	5.75	5.50	5.00	4.50	3.00	1.50				
	Rated Load Boom 1+2+3		2.33	2.33	2.13	2.03	1.78	1.18	1.28	1.13	1.03	0.93	0.83	0.73	0.68
	Hook Height B3		8.75	8.75	8.75	8.50	8.50	8.25	8.00	7.50	7.00	6.00	5.50	4.00	1.50

Crane Model UR-V 374	Working Radius	2.00	2.50	2.70	3.00	3.20	3.50	4.00	4.50	5.00	6.00	7.00	8.00	9.00	9.81
	Rated Load Boom 1	3.03	3.03	2.63	2.33	2.13									
	Hook Height B1	4.00	3.50	3.00	2.00	1.50									
	Rated Load Boom 1+2	3.03	3.03	2.63	2.33	2.18	1.98	1.68	1.48	1.28					
	Hook Height B2	6.75	6.50	6.25	6.00	6.00	5.75	5.50	4.50	3.00					
	Rated Load Boom 1+2+3		2.33	2.33	2.13	2.03	1.73	1.43	1.23	1.08	0.98	0.88	0.80	0.73	0.68
	Hook Height B3	9.00	8.75	8.75	8.75	8.50	8.50	8.25	8.00	7.50	6.00	4.00	1.50		
	Rated Load Boom 1+2+3+4							1.03	0.93	0.83	0.73	0.63	0.56	0.50	0.48
	Hook Height B4							10.75	10.50	10.00	9.50	8.50	7.00	5.50	1.50





Crane Model UR-V 503	Working Radius	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	7.00	8.13
	Rated Load Boom 1	5.05	4.05	3.20							
	Hook Height B1	3.75	3.00	1.50							
	Rated Load Boom 1+2	4.05	4.05	3.35	2.95	2.60	2.30	2.00			
	Hook Height B2	7.25	6.75	6.50	5.75	5.50	4.25	1.50			
	Rated Load Boom 1+2+3		3.05	3.05	2.95	2.60	2.30	2.00	1.75	1.45	1.25
	Hook Height B3		10.00	9.50	9.25	9.00	8.50	8.00	7.50	6.00	1.50

Crane Model UR-V 504	Working Radius	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00	7.00	8.00	9.00	10.63	
	Rated Load Boom 1	5.05	4.05	3.20										
	Hook Height B1	4.25	3.00	1.50										
	Rated Load Boom 1+2	4.05	4.05	3.35	2.95	2.60	2.30	1.95	1.80					
	Hook Height B2		7.25	6.75	6.50	6.00	5.00	4.00	1.50					
	Rated Load Boom 1+2+3		3.05	3.05	2.95	2.60	2.30	1.95	1.75	1.40	1.15			
	Hook Height B3		9.00	9.50	9.25	9.00	8.50	8.00	7.50	6.00	1.50			
	Rated Load Boom 1+2+3+4				2.05	2.05	2.05	1.85	1.65	1.50	1.25	1.10	1.00	0.80
	Hook Height B4				12.25	12.00	11.75	11.75	11.25	11.00	10.00	9.75	8.00	1.50

Crane Model UR-V 803	Working Radius	2.00	2.50	2.70	3.00	3.50	4.00	4.50	5.00	5.50	6.00	7.00	8.00	9.20
	Rated Load Boom 1	8.07	8.07	7.07	6.07	5.17	4.67							
	Hook Height B1	5.25	4.75	4.50	4.50	3.75	1.75							
	Rated Load Boom 1+2		6.07	6.07	6.07	5.17	4.57	4.12	3.67	3.37	3.07	2.67		
	Hook Height B2		8.00	8.00	7.75	7.50	7.25	6.75	6.25	5.50	4.50	1.75		
	Rated Load Boom 1+2+3				3.07	3.07	3.07	3.07	3.07	3.07	3.07	2.47	2.07	1.67
	Hook Height B3				10.50	10.50	10.25	10.00	9.75	9.50	9.00	8.00	6.50	1.75


Crane Model URG 1204	Working Radius	2.50	3.00	3.50	4.00	4.50	5.50	5.50	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00	15.00	16.00	
	Rated Load Boom 1	12.00	10.10	8.50	7.40	6.50	6.50	5.5*	*(5.5 t at 5.29 m)											
	Hook Height B1	6.75	6.50	6.00	5.50	5.00	3.50	1.00												
	Rated Load Boom 1+2		7.50	7.50	0.50	6.50	5.70	5.00	4.60	4.10	3.60	3.00	*(3.0 t at 8.98 m)							
	Hook Height B2		10.75	10.50	10.25	9.75	9.50	9.00	8.75	7.75	6.00	4.00								
	Rated Load Boom 1+2+3			5.70	5.70	5.60	5.50	4.90	4.40	3.50	3.10	2.70	2.50	2.20	2.00	1.9	*(1.9 t at 15.58 m)			
	Hook Height B3			14.25	14.00	14.00	13.75	13.50	13.25	12.50	11.75	11.00	9.75	8.00	6.00	5.00				
	Rated Load Boom 1+2+3+4				4.50	4.50	4.50	4.20	3.90	3.50	3.00	2.70	2.40	2.10	1.90	1.70	1.50	1.40	1.30	
	Hook Height B4				18.00	17.75	17.50	17.25	17.00	16.50	16.00	15.50	14.75	13.75	12.75	11.50	10.00	7.50	1.00	

Crane Model URV 1505	Working Radius	2.30	3.00	4.00	5.00	5.31	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00
	Rated Load Boom 1	15.00	11.60	8.50	7.00	6.80													
	Hook Height B1	7.00	6.75	5.50	3.75	2.00													
	Rated Load Boom 1+2		10.40	8.10	6.50	6.00	5.60	4.80	4.20										
	Hook Height B2		10.50	10.00	9.50	9.25	8.50	7.25	5.00										
	Rated Load Boom 1+2+3			7.40	6.00	5.40	5.00	4.35	3.90	3.55	3.25	2.90	*(2.70 t at 11.75 m)						
	Hook Height B3			13.50	13.00	13.00	12.50	11.75	11.00	10.00	8.50	6.00	2.00						
	Rated Load Boom 1+2+3+4				5.60	4.70	4.70	4.10	3.70	3.30	2.90	2.60	2.30	2.10	1.95	1.85 @ 14.93 m			
	Hook Height B4				16.50	16.25	16.00	15.50	15.00	14.25	13.50	12.25	11.00	9.50	7.25	2.00			
	Rated Load Boom 1+2+3+4+5						4.00	3.40	3.00	2.80	2.60	2.40	2.20	2.05	1.90	1.75	1.60	1.35	1.00
	Hook Height B5						19.50	19.00	18.75	18.00	17.50	16.75	16.00	15.00	14.00	12.25	10.75	8.50	2.00

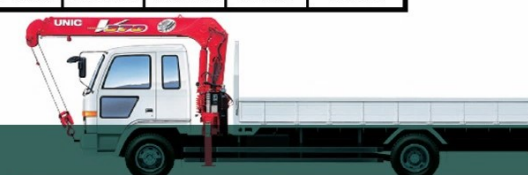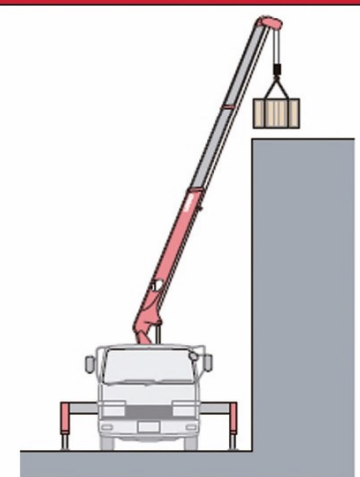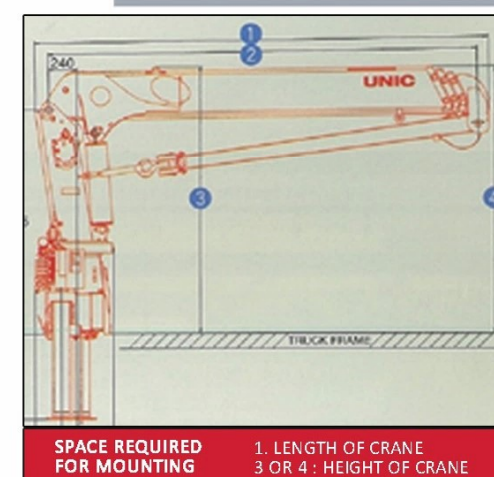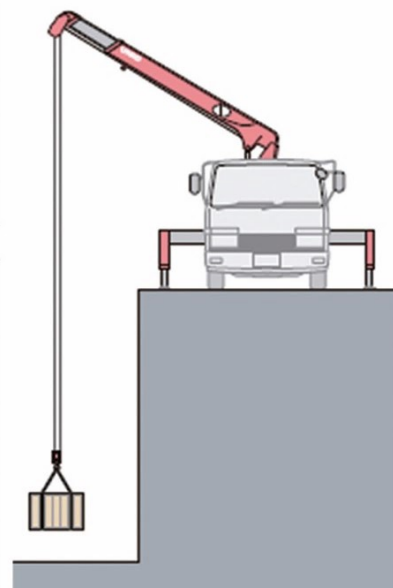



MINI CRAWLER CRANES

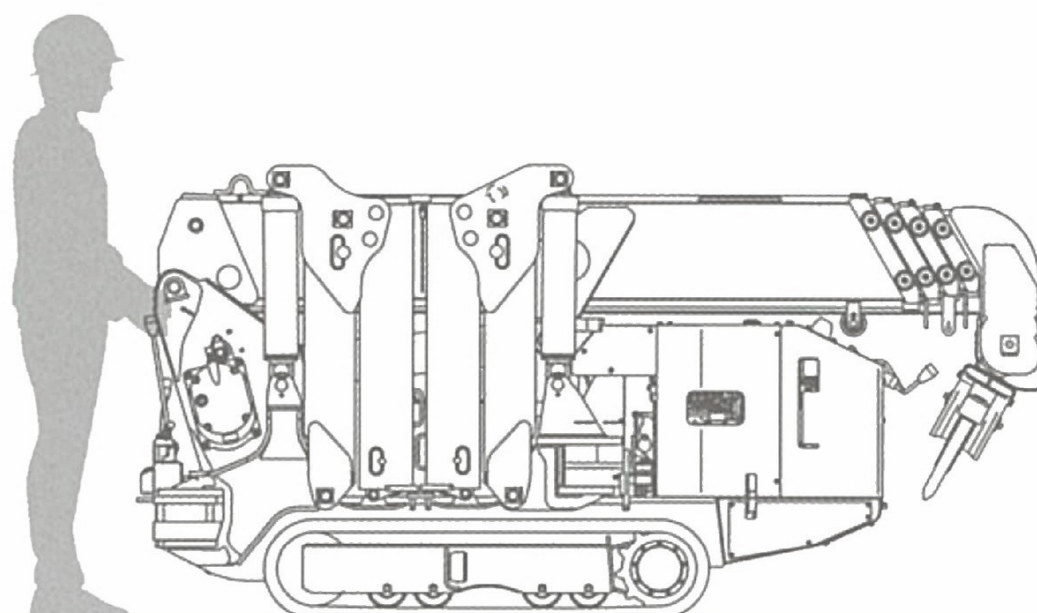

Crane Model	Fuel (Option)	Max Lifting capacity (t @ m)	No of Boom (#)	Min - Max Outreach (m)	Max Hook Height	Max Boom Angle	Outrigger Span (m)	Hydraulic Tank Capacity	Mass (kg) (Electric)	Dimensions (mm)(Electric)		
										Width	Height	Length
UR-W094C P2E	Petrol	0.995 @ 1.5	4	0.15 - 5.17	5.6 m	78°	3.34 X 3.21	17 liters	1000	595	1290	1870
UR-W295C P2	Petrol (Electric)	2.93 @ 1.4	5	0.45 - 8.41	8.8 m	78°	3.88 X 3.93	27 liters	1850 (1980)	600	1375 (1430)	2690
UR-W295C 4	Diesel (Electric)	2.93 @ 1.4	5	0.45 - 8.41	8.8 m	78°	3.88 X 3.93	27 liters	1920 (2040)	600	1380 (1450)	2730 (2900)
UR-W295C B2A	Battery	2.93 @ 1.4	5	0.45 - 8.41	8.9 m	78°	3.86 X 3.91		2350	690	1525	2720
UR-W376C 4	Diesel (Electric)	3.03 @ 2.5	6	0.62 - 14.45	14.9 m	80°	4.56 X 4.44	75 liters	3870 (4020)	1300	1805	4340
UR-W546C 4	Diesel (Electric)	4.05 @ 2.5	6	0.66 - 15.52	16.0 m	80°	5.90 X 5.94	75 liters	4930 (5080)	1380	2035	4870
UR-W547C 4	Diesel (Electric)	4.05 @ 2.5	7	0.80 - 17.83	18.2 m	80°	5.90 X 5.94	75 liters	5070 (5220)	1380	1980	4950
UR-W706C 4	Diesel (Electric)	6.05 @ 3.0	6	0.51 - 18.60	19.5 m	80°	6.55 X 6.46	125.7 L	7990 (8140)	1670	2190	5610
UR-W1006C 2E-1	Diesel (Electric)	10.14 @ 3.0	6	0.04 - 21.93	22.8 m	80°	6.66 X 7.06	215 L	13840 (14020)	2000	2460	6060

STANDARD EQUIPMENT: Radio Remote Control, Auto Stop for Overwinding, Auto Hook Block Stowing, Emergency Stop Button, Level Indicator

*Specifications are subject to change without prior information.



FINE EQUIPMENTS INDIA PVT. LTD.

Fine Centre, Behind Shroff's Shrushti
Off mumbai Bangalore Highway,
Mhalunge, Pune -411045
Maharashtra, INDIA

Tel: +91 83082 88600 , 93264 39921
Email: info@fineequipment.net
Web: www.fineequipment.net
Facebook: /fineequipments



STRENGTH YOU CAN TRUST