

**BSIV**

**FMG  
SERIES**



**FINE**  
**FINE EQUIPMENTS**

[www.fineequipment.net](http://www.fineequipment.net)

# ABOUT FINE



## FINE EQUIPMENTS INDIA PRIVATE LIMITED

Founded in 2002 Fine is a renowned name in the field of construction and demolition equipments. Fine has been making sustainable progress and driving positive change everywhere around the world.

Key Products are Rock Breaker, Motor Grader, Mini Excavator, Sand Wash Plant, Truck Mounted & Mini Crawler Cranes and many more.

Fine is recognized for its highly proactive sales and service network which works with ease and cheer in remote areas all over India. The diversity and commitment of our employees has always been the recipe behind our success.

Fine's consistent growth and success has also been built on the foundation of the company's ability to understand customers' needs and provide equipment alongside service that increases profitability and competitiveness.

Our equipments are well known for their high endurance, greater productivity, high standards of safety, environment friendly and a great operating comfort.

An efficient management team is the backbone of every manufacturing plant. Fine has a competent staff of employees, workers, in the unit. In addition, they strike a fine balance between optimizing production cost and investing in future innovations.

# FUEL - EFFICIENT ENGINE

## KEY FEATURES:

- Robust & Rugged – Sturdy in construction, tough & resilient
- Compact & Durable – Heavy Duty
- Ever evolving technology – Latest Know-how's & Continuous product improvement
- Reliability – Well grounded, Dependable & Consistent performance
- Abreast with latest emission norms – BSIV
- Compact Design – Higher Power to weight ratio & Lighter engine
- Wide Aftermarket Support – PAN India Service Network & Immediate customer support



# RELIABLE STRUCTURE

Wide stance blade lift cylinders provide the most stable grading platform in the industry. The hydraulic motor coupled to the drive circle turn system results in the precise instantly responsive earthmoving tool. It also provides high strength to hold or turn the moldboard smoothly while negotiating maximum loads. This helps in more accuracy and performance resulting into single pass finishes, which make FMG 180 contribute significantly to productivity and cost saving.



# FMG CABIN

Fine operator friendly cab AC cabin User friendly design includes low effort, short throw levers adjustable pedestal, with familiar industry standard operating comforts. Operator compartment lives up to every expectations of A FINE CAB with industry leading comfort safety and efficiency. Unobstructed wide angle views in the front and reverse which reduce operator fatigue, increase productivity & Maximize Safety.

It is Ergonomically designed to give best operating conditions.

- › Air Conditioned.
- › More Comfortable.
- › More glass area for more visibility.
- › Fibre hood to protect engine from impacts.
- › FOPS/ROPS Structure



Best Visibility with AC Cabin



Adjustable seat & Steering



Clear operation Symbols




Rear View Camera

**TRACKING SYSTEM  
MOBILE ACCESS\***





# SPECIFICATIONS THAT POWERS YOUR MACHINE

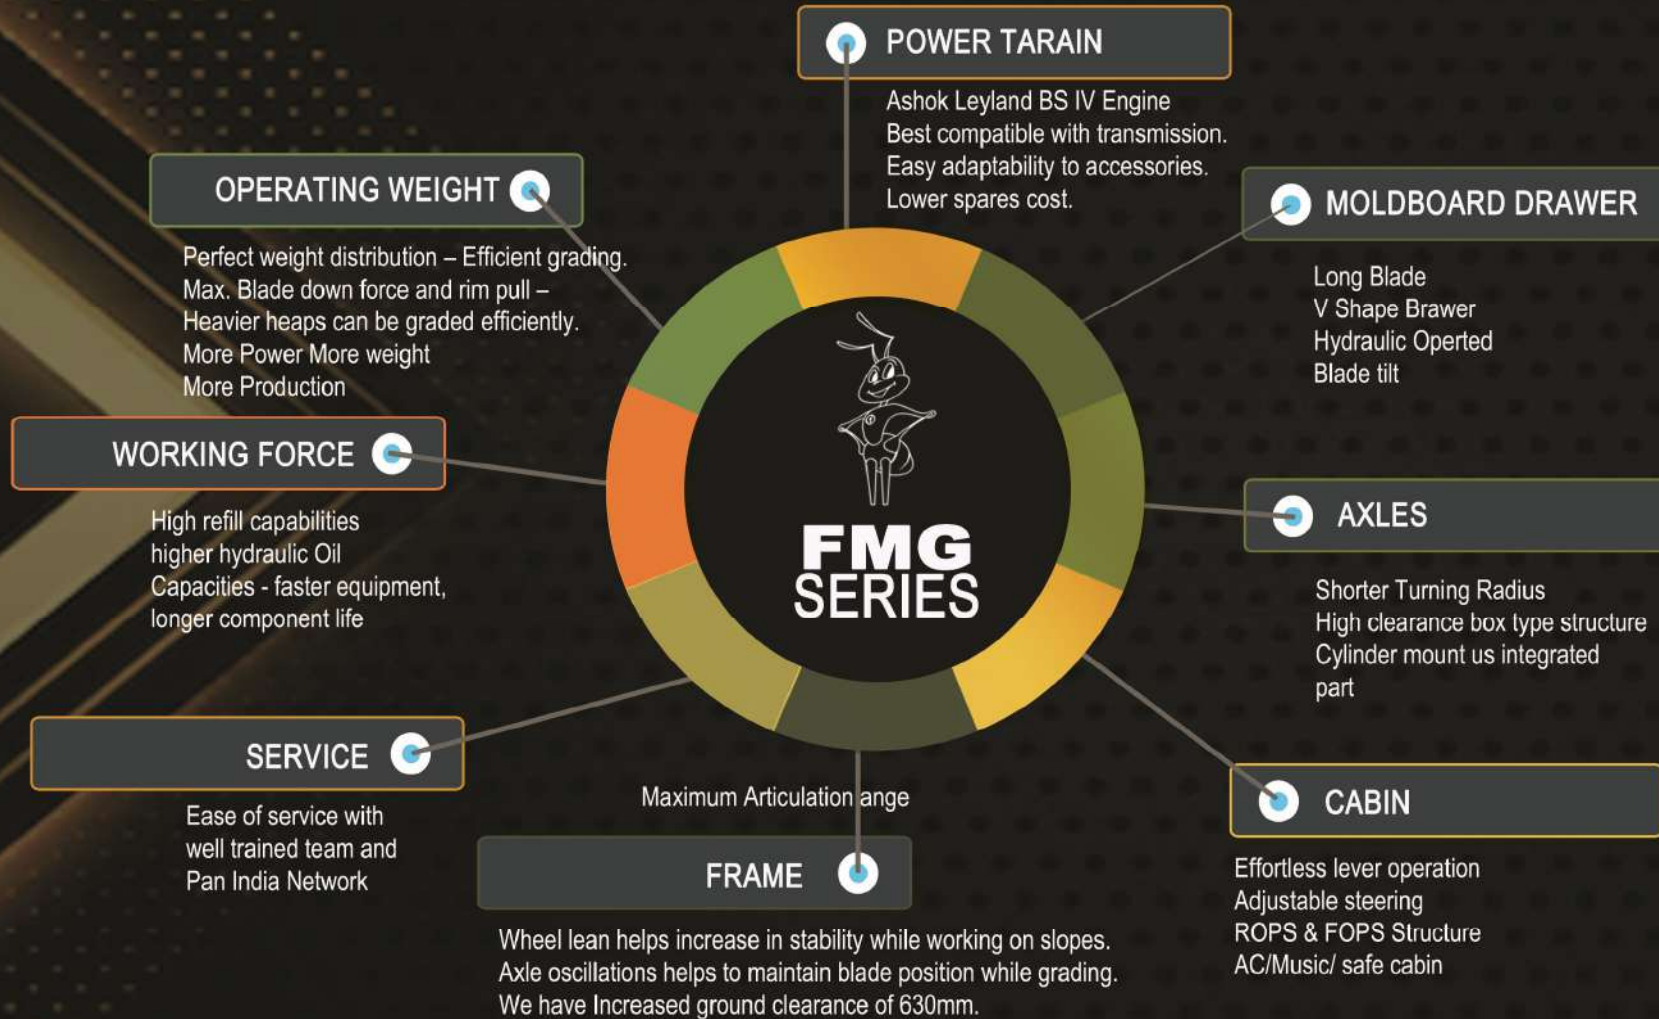

# SPECIFICATION

# FMG 130

<b>ENGINE</b>	Make	Ashok Leyland
	Model	H4C413022 - BSIV
	Apirations	Turbo Charged
	Gross power	130 hp @ 2200 rpm
	Torque	480 Nm @ 1800 rpm

<b>TRANSMISSION</b>	Transmission model	Belian
	Max. travel speed (F)	40 km/hr
	Max. travel speed (R)	30 km/hr
	No. of speeds Forward	2
	No. of speeds Reverse	2
Electrical battery rating	12 V. 125 AH	

<b>AXLE</b>	Front	Non Driven, steerable, central Pivoted
	Middle	Driven, Non steerable, central Pivoted
	Rear	Driven, Non steerable, central Pivoted
		± 5° Oscillation Angle

<b>MOLDBOARD</b>	Moldboard Length	3360 mm
	Moldboard Thickness	16 mm
	Moldboard Height	510 mm
	Mold Board	360°(Angle of revolution)
	Rotating Degree of Mold Board	360°(Angle of revolution)
Circle drive	close type, worm wheel & pinion	

Blade Side Shift (L/R)	515 mm
Blade Tilt Angle (L/R)	35°
Blade Pitch Angle	Forward- 35° Backward 5°
Blade Lifting Height	400 mm
Blade Cutting Depth	350 mm

<b>DOZER</b>	Dozer Height	975 mm
	Dozer Width	16 mm
	Dozer Height above ground	435 mm

## STEERING

Type	Power Steering
Valve	Load sensing with Priority Valve

## BRAKES

Service brake type	Disc (Foot Operated )
Service brake actuation	Hydraulic Air assisted
Parking brake type	Disk Brake Mounted on transmission drive shaft Mechanically Operated

## HYDRAULIC SYSTEM

Main pump type	Fixed Displacement Gear Pump
Max. pump flow rate	60 L/min
Max. working pressure	200 bar
Other Fetures	Load holding with pressure relief valves for lift and sensing cylinder

## SERVICE CAPACITES

Fuel tank	200 L
Engine Oil	13 L
Engine Coolant	20 L
Hydraulic Tank	130 L
Transmission	15 L
Middle Axle (Differential)	5 L
Final drive (Rear Axle)	5 L

## ERGONOMICALLY DESIGNED

### AC CABIN

FOPS /ROPS	YES
Cabin operations	YES

# PRODUCTIVITY EVERYWHERE

## OPERATING WEIGHTS



Operating weight	9100kg*
On front axle	2500 kg
On rear axle	6600 kg

## TYRES

Tyre size	16 / 70 x 24 16 PR
-----------	--------------------

## DIMENSION (mm)

A- Over all length	8700
B- Wheel base	5400
C- Mold board base	2100
D- Width front tyre centre line	1660
E- Width outside tyre	2066
F- Mold board standard width	3360
G- Over all height with cab	2940

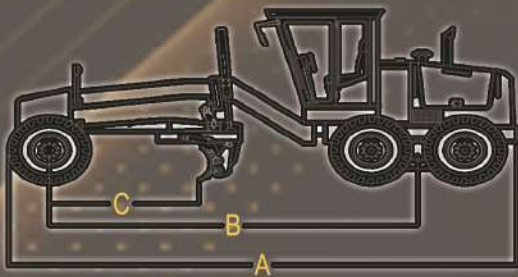

# SPECIFICATION

# FMG 180

## ENGINE

Make	Ashok Leyland
Model	H6C418022 - BSIV
Apirations	Turbo Charged
Gross power	180 hp @ 2200 rpm
Torque	700 Nm

## TRANSMISSION

Transmission model	YD 13 or Equivalent
Max. travel speed (F)	44.9 km/hr
Max. travel speed (R)	30.55 km/hr
No. of speeds Forward	6
No. of speeds Reverse	3

## AXLE

Differential type	NO-SPIN Differential
Final drive type	CHAIN DRIVE
Wheel lean angle	±17 Degree
Front angle oscillation	±15°
Rear axle oscillation	±15°

## MOLD BOARD

Mold board Tilt Angle	36-66 Degree
Mold board Lift above ground	116mm
Max. slope angle	L / R 90°
Blade max. depth in ground	500mm
Circle diameter	1455mm
Circle thickness	140mm
Rotating Degree of Mold Board	360°(Angle of revolution)
Circle turn system	Covered

## STEERING

Steering configuration	Full hydraulic steering
Steering relief pressure	15±1MPa
Steering pump type	GEAR PUMP
Minimum turning radius	7.5m
Steering angle (Front Wheel)	±45°
Frame articulation angle	±25°

## BRAKES

Service brake type	Disc (Front)
Service brake actuation	Hydraulic
Parking brake type	Hub Brake
	Mechanically Operated
Parking brake actuation	Drum Brake

## HYDRAULIC SYSTEM

Main pump type	Dual Pump
Main relief pressure	16±0.5MPa
Pump flow	70L/min

## SERVICE CAPACITIES

Fuel tank	280L
Crank case	28L
Cooling system	30L
Hydraulic system	130L
Transmission & Torque convertor	28L
Tandem (Each Side)	23L
Final drive (Rear Axle)	28L

## WORKING CAPACITIES

Maximum Draw pull	72kN
Cutting pressure	70KN

## ERGONOMICALLY DESIGNED

### AC CABIN

FOPS /ROPS	YES
Cabin operations	YES

# THE ULTIMATE PERFORMER

## OPERATING WEIGHTS



Operating weight	14000kg
On front axle	4200kg
On rear axle	9800kg

## TYRES

Tyre size	17.5-25 12PR
-----------	--------------

## DIMENSION (mm)

A- Over all length	8500
B- Wheel base	5985
C- Mold board base	2380
D- Width front tyre centre line	2150
E- Width outside tyre	2600
F- Mold board standard width	3660
F- Over all height with cab	3400

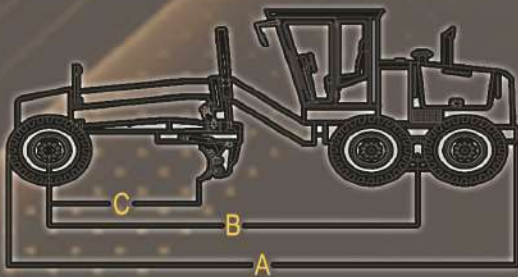

# FMG SERIES

FINE Product Development team has utilized extensive consumer insight and feedback to develop this product which is built to withstand India's rough terrain and heavy usage. In addition, the product offers all the relevant features using the latest vehicle systems and technologies at competitive prices.

**DOMINANT  
MODERN  
POWERFUL**



**FINE EQUIPMENTS  
INDIA PRIVATE LTD.**

Fine Centre, Behind Shroff's Srushti,  
Off Mumbai - Bangalore Highway,  
Mhalunge, Pune 411045. INDIA.

Tel: +91 20 2980 8962  
Mob: +91 83082 88600  
Email: [info@fineequipment.net](mailto:info@fineequipment.net)  
Web: [www.fineequipment.net](http://www.fineequipment.net)

